

This document gives general recommendations regarding airbag modelling, some specific recommendations are highlighted in black or orange depending on the inflation method:


- Uniform Pressure –UP– is typically used with scaled airbags and IMM2 (In-Position load cases)
- Gas Flow –GF– is typically used with folded airbags and IMM1 (Out of Position / detailed analysis)

CONTROL_ANALYSIS.TIME

- Use INT_MTH=EULER
- Use TIME_STEP in range [1.10⁻⁶ ... 5.10⁻⁶]
- Avoid sub-cycling between MB and FE
 - ⚠ The initial element time step is determined from the reference mesh and also from the IMM time step when IMM2 is used with IMM_DAMP_MTH=1 or 2. Check the required FE time step in the Reprint file.
- The FE time step used is: $\Delta t_{used} = \min(\Delta t_{FE(element)}, \Delta t_{GF})$


MESHING AND FOLDING

- Recommended element size: max 10 mm for correct deployment and well-handled contact
- Element type: MEM3
- Use a closed mesh: Preferably mesh vent holes as well (don't leave nodes inside the hole area). If not closed by hand, mesh will be automatically closed by adding HOLE.MODEL* inside AIRBAG_CHAMBER.
- Initial mesh
 - Scaled mesh created by scaling down the reference mesh (using SCALING or any pre-processor, don't apply projections)
 - ⚠ Avoid max stretches higher than 1 and elements shrunk to zero
 - Folded mesh created with Folder and/or simulations
 - ⚠ Avoid intersected elements and minimise heavily distorted elements
- AUTO_VOLUME=ON (normals of elements will point outwards for correct calculation of the initial bag volume)
- When reference elements are used (reference panels) set OUTWARD_NORMAL_STATE=INITIAL

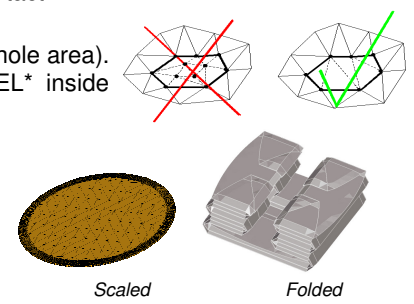


ELEMENT AND MATERIAL FORMULATION

- Use MATERIAL.FABRIC_SHEAR (direction-dependent material with separate shear stiffness, input data: parameters or curves), alternatives are ISOLIN or ORTHOLIN.
- In PROPERTY.MEM3, use STRAIN_FORM=GREEN
- Model wrinkling of the elements (low material compression stiffness) by using TENSION_ONLY=ON and REDUCTION_FACTOR in range [0.0001 ... 0.1] for coarse to very fine meshes. Below REDUCTION_LIMIT_STRAIN, compression stiffness equals again tension stiffness ⚠ For material FABRIC* expressed in engineering strain, for other materials: same strain formulation as in the property definition.
- MATERIAL.HOLE properties for meshed holes:
 - Set STIF=1E-2. Only valid for holes generated by hand (automatically generated holes have no stiffness)
 - HOLE.MODEL*:
 - UP uses HOLE.MODEL1 for flow from chamber to ambient and for flow between chambers
 - GF uses HOLE.MODEL1 for flow from chamber to ambient and HOLE.MODEL3 for flow between chambers
 - Use a CDEX close to 1
- Model straps with MATERIAL.STRAP and DAMP~0.7 instead of STRAP
- Model heat loss through material by using Kappa~50

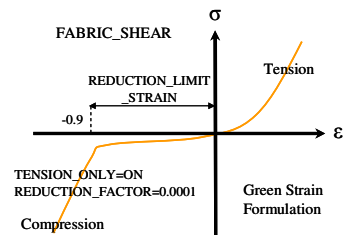

RELAXATION AND CONTROL OF THE AIRBAG

- Relaxation when initial and reference meshes are present
 - Scaled bags: add CONTROL_IMM.METHOD2 (spring damper based method) In PROPERTY.MEM3, preferably set IMM_DAMP_MTH=0, IMM_DAMP=[0.05 ... 0.2], IMM_STIF_REDUCE=[0 ... 0.0001] alternative is IMM_DAMP_MTH=2, IMM_DAMP=[0.00001 ... 0.0001], IMM_STIF_REDUCE=[0 ... 0.0001]
 - Folded bags: add CONTROL_IMM.METHOD1 (strain based method)
 - Relax airbag before inflation
 - TIME_WINDOW ~3ms
 - During relaxation define alpha damping ~1.10E+4 in CONTROL_AIRBAG
- During deployment, use alpha damping [0...10]. Higher values damp out low airbag frequencies



AIRBAG INFLATION/INFLOW/OUTFLOW

- INFLATOR.* element only is sufficient for UP, jet can be added for jet effect ⚠ Locate jet inside chamber
- Number of Euler cells to start with: DAB [40000...75000], PAB [40000...100000], CAB ~100000
- Check convergence of results w.r.t. number of cells to optimise runtime/accuracy ratio

- Grid orientation ideally aligned with airbag FE mesh
- Rule of Thumb: cell is active when ~50% or more of its volume is inside airbag volume
- INFLATOR_MTH=SONIC_CELL
- ANTI_THROUGH_FLOW=ON


TIP Potential CPU improvements when using GF

1. in CONTROL_AIRBAG use time delay GAS_FLOW_TRIGGER
2. in CONTROL_AIRBAG switch from GF to UP with ISOBARIC_SWITCH.TIME when bag is fully inflated
3. in GAS_FLOW_GRID use MIN_SIZE to prevent small cells initially

- ⚠ Check accuracy of inflator data (e.g. by modelling a tank test) → crucial for the results
- In CONTROL_AIRBAG, use BLOCK_FLOW=1 to stop outflow through fabric elements making contact

CONTACT

- Contact with environment
 - CONTACT_METHOD.NODE_TO_SURFACE_CHAR with facet surfaces
airbag == slave
 - CONTACT_METHOD.SURFACE_TO_SURFACE with FE surfaces
INITIAL_PEN_TRACK=ON
CONTACT_FORCE.ADAPTIVE
TIME_STEP 5 to 10% larger than FE time step
DAMP_COEF in range [0.05...0.1]
FRIC_FUNC starting at (0,0), use engineering values (friction coef vs. contact velocity)
GAP_TYPE.FUNC with gap thickness constant in time
CONTACT_EDGE
INITIAL_TYPE.CHECK




- Self contact, only MASTER_SURFACE to be defined, no slave surface required.
 - Can be neglected in UP with scaled bags if deployment allows this. Generally only inflated end state is relevant.
 - For self contact with GF (==contact between FE surfaces) use the contact settings described above.
- **TIP** If contacts are lost (can be detected from animation by making cross-sections)
 - Increase gap thickness
 - Reduce the FE time step and the contact TIME_STEP
 - Define VAR_TIME_STEP in combination with contact TIME_STEP
 - Self-contact: when having very tight folds, perform a separate relaxation with low FE/contact time step and gap thickness growing in time. Set WRITE_FEMESH=ON and use this new initial mesh
- STATE.FE_MODEL and STATE.CONTACT related e.g. to the inflator SWITCH can improve the CPU performance.
- **TIP** See also the MADYMO Facet Modelling Guidelines

OUTPUT


⚠ REQUEST SUFFICIENT OUTPUT to avoid having to run the model again if some results are missing

Reprint file

- Pay attention to all warnings
 - Avoid contact warnings about intersections; penetrations are less harmful
 - Check extrapolation warnings (be careful with pressure dependent outflow)
- Check the different required time steps (MB, FE, GF)
- Check initial element stretches
 - Scaled bags with CONTROL_IMM.METHOD2: keep max stretches < 1
 - Folded bags with CONTROL_IMM.METHOD1:
 - Keep initial IMM ratio A_0/A_{ref} ideally between 90%–110%
 - Keep max local stretches < 1.25

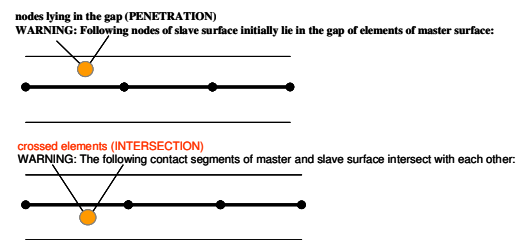

- Check working of jet
 - ⚠ "Jet partly blocked" during a long period of the run might give wrong flow
→ refine Euler grid to avoid this
 - ⚠ "Jet fully blocked" means that the jet is outside active cells
→ refine Euler grid or free space (e.g. create a thick gap) around inflator

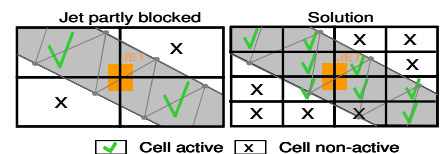

Other output files

- Study all output carefully (*.rep, *.kn3/*.h5, *.fhs, *_gf.h5, *_ani.h5, *.cntfrc, etc...)
- Analyse the sensitivity of the model to less well-known parameters (contact friction, permeability, hole properties, material stiffness, etc...)
- Time history files: Use EXTENDED_SAMPLING in relevant output to avoid aliasing effects

TIP See released application examples e.g.:

- a_driver_airbag.xml, a_immrefpasbag.xml, a_thorax_airbag_up.xml, a_frontal(el/fc)_scaled_dab.xml
- a_passenger_airbag.xml, a_thorax_airbag_gf.xml